

MODLE: ST07

Love This Product? Spread the word and leave us a review on amazon

USING NOTICE


- (1) This stand suitable for in-house use.
- (2)Please move this stand gently with two person.


SAFETY WARNING

- (1) Don't climb or sit on the stand.
- (2) Don't place very hot or very cold things on the glass surface.
- (3) Don't touch the glass surface with hard and acuate object.
- (4) Don't use causticity or powder contained cleanser to clean the glass surface.




Do not use electric screwdriver for assembling this product.

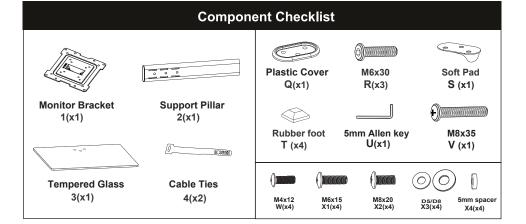

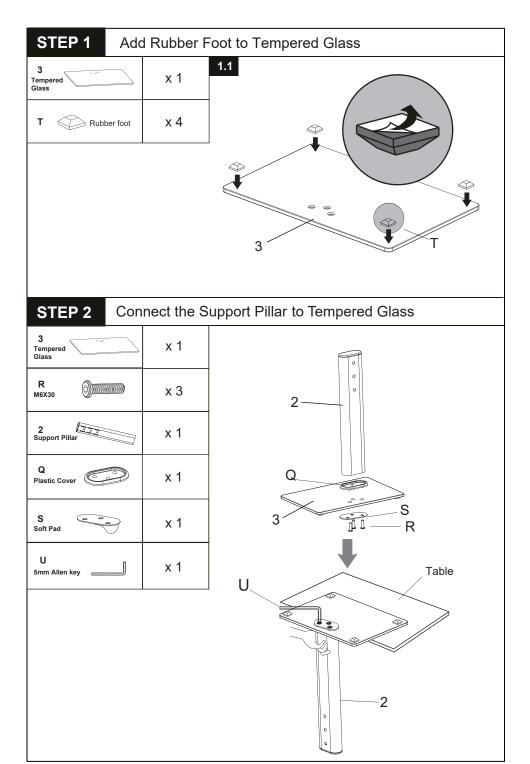

STEP 3 Measure VESA and Check TV screws




Measure the distance between the holes located at the back of your TV (these measures may form the shape of a square, or a rectangle) and check that these taken measures are within the VESA(*) range for this wall mount. (*) VESA: International standard established by the TV manufacturers used to determine if LCD / LED TVs are compatible with wall mounts.

75 mm \approx 2 7/8 in 100 mm \approx 4 in 200 mm ≈ 7 7/8 in 300 mm ≈ 11 3/4 in 400 mm ≈ 15 3/4 in


Check TV screws

Hand thread screws into the threaded inserts on the back of your TV to determine which screw diameter (M4, M6, or M8) to use.



Attach the Monitor Bracket to a TV STEP 4

| 1 4 | | Monitor Bracket | x 1 |
|-----|----|--------------------|-----|
| w | | M4x12 | x 4 |
| X1 | | M6x15 | x 4 |
| Х2 | | M8x20 | x 4 |
| хз | 90 | D5/D8 | x 4 |
| X4 | 0 | 5mm spacer | x 4 |

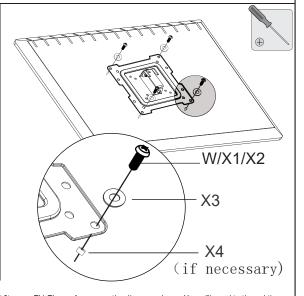

First, make sure the diameter of the bolt (w/x1/x2) fits your TV. Then, please see the diagram above. You will need to thread the bolt into the TV using the correct washer (X3) and spacer(x4) if necessary. Please make sure the monitor bracket is vertically centered.

